



75
l/min

19.8
USGPM



15
bar

218
P.S.I.


POLY 2073

- 63.5000.97.3 - VS
- 63.5100.97.3 - VP
- 63.5200.97.3 - VA
- 63.5250.97.3 - VDE
- 63.5261.97.3 - VM

Pompa a 3 membrane-pistone semidrauliche.

Pompe à 3 piston-membranes semi-hydrauliques.

Bomba de 3 membranas-pistón semi-hidráulicas

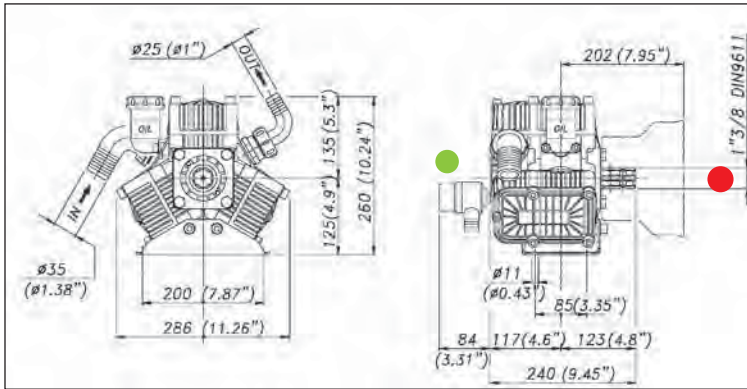

Optional Option Opcional



Caratteristiche tecniche Caractéristiques techniques Características técnicas		Mod. POLY 2073	
g/min; t/min; rev./min.		g/min	R.P.M.
Potenza - Puissance - Potencia		KW	HP
Peso - Poids - Peso		kg	lb
Dislivello aspirazione Pression négative Presión negativa	MAX	M	ft
		Servizio discontinuo Emploi discontinuo Servicio discontinuo	mt
Ø Aspirazione - Aspiration - Aspiración		mm	in
Ø Mandata - Refoulement - Presión		mm	in
Max. Temperatura - Température - Temperatura		°C	°F
Tipo olio - Type huile - Tipo aceite		SAE	W
Capacità olio - Capacité huile - Capacidad aceite		lt	U.S.G.

TABELLA RENDIMENTI - TABLEAU DES PERFORMANCES TABLA DE RENDIMIENTOS

POLY 2073	g./min. - t/min. - rev./min.							
	400		450		500		550	
BAR	L/min.	Kw	L/min.	Kw	L/min.	Kw	L/min.	Kw
P.S.I.	USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2	54,5	0,2	61,4	0,2	68,2	0,3	75,0	0,3
29	14,4	0,3	16,2	0,3	18,0	0,4	19,8	0,4
5	53,8	0,5	60,5	0,6	67,3	0,7	74,0	0,7
72,5	14,2	0,7	16,0	0,8	17,8	0,9	19,6	1,0
10	52,4	1,0	58,9	1,2	65,5	1,3	72,0	1,4
145	13,8	1,4	15,6	1,5	17,3	1,7	19,0	1,9
15	50,9	1,5	57,3	1,7	63,6	1,9	70,0	2,1
218	13,5	2,0	15,1	2,3	16,8	2,5	18,5	2,8

ALBERO POMPA - ARBRE POMPE - CIGÜEÑAL BOMBA

